


4HSE

4 Flutes High Speed Short Length End Mills

HARD series

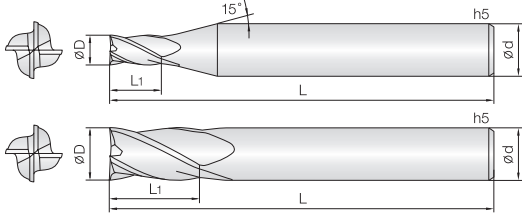


- Endmills for pre-hardened and hardened steel (HRc50~60)
- Good wear resistance by Si-based PVD coating.
- Optimum for heavy condition by short flute design.
- Reinforced edge design for preventing edge chipping.
- Short overall length for easy use with shrinking chuck.
- Minimize fracturing by high TRS fine(0.5 μm) WC grade.




D Size	D Tolerance
ø0.5 ~ 5	+0 ~ -0.01 mm
ø6 ~ 12	-0.01 ~ -0.025 mm
ø16	-0.015 ~ -0.03 mm

Slotting																
Material	Alloy Steel/ Tool Steel				Prehardened Steel / Hardened Steel				Hardened Steels				Hardened Steels			
Hardness	30 ~ 40HRC				40 ~ 50HRC				50 ~ 55HRC				55 ~ 60HRC			
Outside Diameter	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth
∅0.3	50,000	190	0.03	0.3	45,000	140	0.03	0.3	40,000	115	0.02	0.150	33,000	70	0.01	0.075
∅0.4	50,000	235	0.04	0.4	45,000	180	0.04	0.4	40,000	140	0.02	0.200	33,000	90	0.01	0.100
∅0.5	50,000	370	0.05	0.5	45,000	280	0.05	0.5	40,000	220	0.03	0.250	33,000	140	0.01	0.125
∅0.6	50,000	470	0.06	0.6	45,000	360	0.06	0.6	40,000	285	0.03	0.300	30,000	160	0.02	0.150
∅0.8	50,000	600	0.08	0.8	40,000	440	0.08	0.8	30,000	295	0.04	0.400	25,000	185	0.02	0.200
∅0.9	49,000	655	0.09	0.9	39,000	520	0.09	0.9	27,800	330	0.05	0.450	22,700	205	0.02	0.225
∅1	48,000	1,050	0.1	1.0	38,000	684	0.1	1.0	25,500	430	0.05	0.500	20,500	260	0.03	0.250
∅2	33,300	1,190	0.2	2.0	26,000	816	0.2	2.0	17,500	500	0.10	1.000	14,500	310	0.05	0.500
∅3	21,800	1,190	0.3	3.0	17,300	816	0.3	3.0	11,500	500	0.15	1.500	9,500	310	0.08	0.750
∅4	16,700	1,232	0.4	4.0	13,200	840	0.4	4.0	8,800	530	0.20	2.000	7,200	325	0.10	1.000
∅5	15,700	1,400	0.5	5.0	12,500	966	0.5	5.0	8,300	600	0.25	2.500	6,400	340	0.13	1.250
∅6	13,100	1,330	0.6	6.0	10,350	924	0.6	6.0	6,900	575	0.30	3.000	5,300	335	0.15	1.500
∅8	9,880	1,300	0.8	8.0	7,800	864	0.8	8.0	5,200	535	0.40	4.000	4,000	300	0.20	2.000
∅10	7,800	1,190	1.0	10.0	6,150	816	1.0	10.0	4,100	500	0.50	5.000	3,200	290	0.25	2.500
∅12	6,650	1,190	1.2	12.0	5,250	816	1.2	12.0	3,500	500	0.60	6.000	2,650	290	0.30	3.000
∅16	5,540	1,090	1.6	16.0	4,340	732	1.6	16.0	2,600	430	0.80	8.000	1,840	215	0.40	4.000
∅18	5,540	1,090	1.8	18.0	4,340	730	1.8	18.0	2,600	430	0.90	9.000	1,840	215	0.45	4.500
∅20	4,640	1,008	2.0	20.0	4,340	730	2.0	20.0	2,600	430	1.00	10.000	1,840	215	0.50	5.000



Side Cutting																
Material	Alloy Steel/ Tool Steel				Prehardened Steel / Hardened Steel				Hardened Steels				Hardened Steels			
Hardness	30 ~ 40HRC				40 ~ 50HRC				50 ~ 55HRC				55 ~ 60HRC			
Outside Diameter	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth	RPM	FEED	Ap Axial Depth	Ae Radial Depth
∅0.3	50,000	228	0.3	0.009	45,000	168	0.3	0.009	40,000	138	0.15	0.006	33,000	84	0.08	0.003
∅0.4	50,000	282	0.4	0.012	45,000	216	0.4	0.012	40,000	168	0.20	0.008	33,000	108	0.10	0.004
∅0.5	50,000	444	0.5	0.015	45,000	336	0.5	0.015	40,000	264	0.25	0.010	33,000	168	0.13	0.005
∅0.6	50,000	564	0.6	0.018	45,000	432	0.6	0.018	40,000	342	0.30	0.012	30,000	192	0.15	0.006
∅0.8	50,000	720	0.8	0.024	40,000	528	0.8	0.024	30,000	354	0.40	0.016	25,000	222	0.20	0.008
∅0.9	49,000	786	0.9	0.027	39,000	624	0.9	0.027	27,800	396	0.45	0.018	22,700	246	0.23	0.009
∅1	48,000	1,260	1.0	0.030	38,000	821	1.0	0.030	25,500	516	0.50	0.020	20,500	312	0.25	0.010
∅2	33,300	1,428	2.0	0.060	26,000	979	2.0	0.060	17,500	600	1.00	0.040	14,500	372	0.50	0.020
∅3	21,800	1,428	3.0	0.090	17,300	979	3.0	0.090	11,500	600	1.50	0.060	9,500	372	0.75	0.030
∅4	16,700	1,478	4.0	0.120	13,200	1,008	4.0	0.120	8,800	636	2.00	0.080	7,200	390	1.00	0.040
∅5	15,700	1,680	5.0	0.150	12,500	1,159	5.0	0.150	8,300	720	2.50	0.100	6,400	408	1.25	0.050
∅6	13,100	1,596	6.0	0.180	10,350	1,109	6.0	0.180	6,900	690	3.00	0.120	5,300	402	1.50	0.060
∅8	9,880	1,560	8.0	0.240	7,800	1,037	8.0	0.240	5,200	642	4.00	0.160	4,000	360	2.00	0.080
∅10	7,800	1,428	10.0	0.300	6,150	979	10.0	0.300	4,100	600	5.00	0.200	3,200	348	2.50	0.100
∅12	6,650	1,428	12.0	0.360	5,250	979	12.0	0.360	3,500	600	6.00	0.240	2,650	348	3.00	0.120
∅16	5,540	1,308	16.0	0.480	4,340	878	16.0	0.480	2,600	516	8.00	0.320	1,840	258	4.00	0.160
∅18	5,540	1,308	18.0	0.540	4,340	876	18.0	0.540	2,600	516	9.00	0.360	1,840	258	4.50	0.180
∅20	4,640	1,210	20.0	0.600	4,340	876	20.0	0.600	2,600	516	10.00	0.400	1,840	258	5.00	0.200



- The edge of the flute precisely grinded. If you want to measure the tool, and to avoid damaging on the flutes, use non-contact measuring method.
- When milling workpiece, HRC over 60 hardened steel , reduce 20% of the RPM and feed compared to the same diameter.
- Use this table for your reference. Adjust the parameters depending on your machining geometry, machining purpose and CNC.
- Use a machine with low vibration and good rigidity (∅1 or less, the vibration tolerance management should be within 5 μm).
- Air blow or mist coolants are recommended and note for chip emission, heat, or ignition.