



7S-F45-06

Face mills

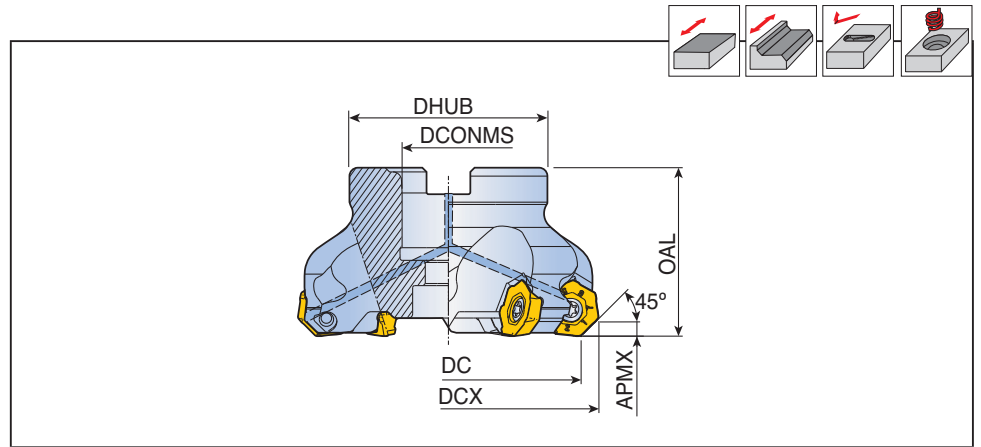

Designation		Dimension (mm)						Coolant hole	Arbor style	Kg	Mounting bolt	Insert
		DC	DCX	DCONMS	DHUB	OAL	APMX					
7S-F45 332-16R-06	3	32	40.4	16	38	40	3.2	•	E	0.2	KTB 32B	7EMT 0604... E234
440-16R-06	4	40	48.5	16	38	40	3.2	•	A	0.3	SH M8x30	
550-22R-06	5	50	58.5	22	45	40	3.2	•	A	0.4	LH M10x25	
663-22R-06	6	63	71.5	22	47	40	3.2	•	A	0.5	LH M10x25	
780-27R-06	7	80	88.5	27	70	50	3.2	•	A	1.3	LH M12x30	
8100-32R-06	8	100	108.5	32	85	50	3.2	•	A	1.9	LH M16x35	
9125-40R-06	9	125	133.5	40	85	63	3.2	•	A	3.3	SH M20x40	
7S-F45 780-25.4R-06	7	80	88.5	25.4	70	50	3.2	•	A	1.3	LH M12x30	
8100-31.75R-06	8	100	108.5	31.75	80	50	3.2	•	A	1.8	LH M16x35	
9125-38.1R-06	9	125	133.5	38.1	80	63	3.2	x	B	2.8	-	

• Mounting bolt with coolant through hole is available on request (ordering example: SH M8x1.25x30-C)

Spare parts

Designation	Screw	Wrench			
	7S-F45-06	TS 40093I/HG	T-T15		

E287-E289

E290-E291

E348