


TFMSB-09



High feed face mills

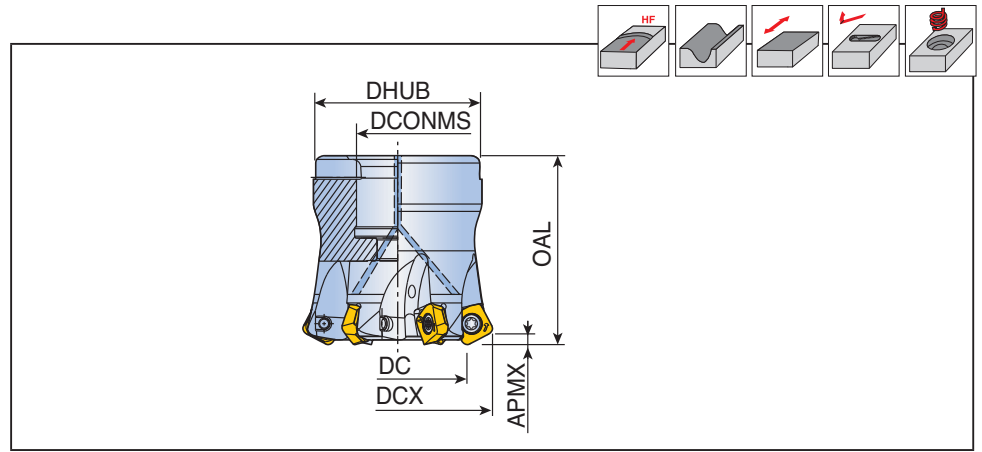

Designation		Dimension (mm)						Coolant hole	Arbor style	Kg	Mounting bolt	Insert
		DCX	DC	DCONMS	DHUB	OAL	APMX					
TFMSB 432-16R-09	4	32	17.4	16	30	40	1.2	●	E	0.1	KTB 32B	SBMT 0904...
440-16R-09	4	40	25.5	16	38	40	1.2	●	A	0.2	SH M8x25	E263
540-16R-09	5	40	25.5	16	38	40	1.2	●	A	0.2	SH M8x25	
450-22R-09	4	50	35.5	22	45	50	1.2	●	A	0.4	SH M10x30	
550-22R-09	5	50	35.5	22	45	50	1.2	●	A	0.4	SH M10x30	
650-22R-09	6	50	35.5	22	45	50	1.2	●	A	0.4	SH M10x30	
750-22R-09	7	50	35.5	22	45	50	1.2	●	A	0.4	SH M10x30	
652-22R-09	6	52	37.5	22	45	50	1.2	●	A	0.4	SH M10x30	
752-22R-09	7	52	37.5	22	45	50	1.2	●	A	0.4	SH M10x30	
663-22R-09	6	63	48.4	22	58	50	1.2	●	A	0.8	SH M10x30	
763-22R-09	7	63	48.4	22	58	50	1.2	●	A	0.8	SH M10x30	
763-27R-09	7	63	48.4	27	58	50	1.2	●	A	0.7	SH M12x35	
863-22R-09	8	63	48.4	22	58	50	1.2	●	A	0.8	SH M10x30	
866-22R-09	8	66	51.5	22	58	50	1.2	●	A	0.8	SH M10x30	
780-27R-09	7	80	65.8	27	70	60	1.2	●	A	1.4	SH M12x35	
880-27R-09	8	80	65.8	27	70	60	1.2	●	A	1.4	SH M12x35	

• Mounting bolt with coolant through hole is available on request (ordering example: SH M8x1.25x25-C)

Spare parts

Designation	Screw	Wrench			
TFMSB-09	TS 35A088I/HG	TD 10P			
TFMSB 750-22R-09	TS 35A070I/HG	TD 10P			
TFMSB 752-22R-09	TS 35A070I/HG	TD 10P			

 E287-E289	 E290-E291	 E357
---------------	---------------	----------