


Inserts



Size	Dimension (mm)				
	IC	S	APMX	BS	RE
06(M, MM, ML)	13.7	6.2	3.5	1.0	1.0
06-MT	13.7	6.0	4.2	-	0.8
06-MLW	13.7	6.2	3.5	1.5	0.2

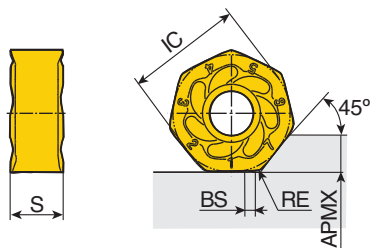

Insert	Designation	Recommended machining conditions		Ceramic		Coated						Uncoated	
		ap (mm)	Feed (mm/tooth)	AS10	TT9080	TT9030	TT8080	TT8525B	TT7080	TT7515	TT6080	TT2510	K10
	XNMU 0605 ANR-M	1.0-3.0	0.20-0.10		●				●	●			
	XNHU 0605 ANN-MM	1.0-3.5	0.20-0.10		●					●	●	●	
	XNHU 0605 ANN-ML	1.0-3.5	0.20-0.10		●		●				●		
	XNMU 060508-MT	1.0-4.2	0.30-0.10				●						
	XNHU 0605 ANR-MLW	0.3-1.0	0.15-0.08				●						

● : Standard items

